




MONOBLOCK INDUSTRIAL ENCLOSURE IP66



BRES-325

Polyester enclosure 300 x 250 x 140 mm

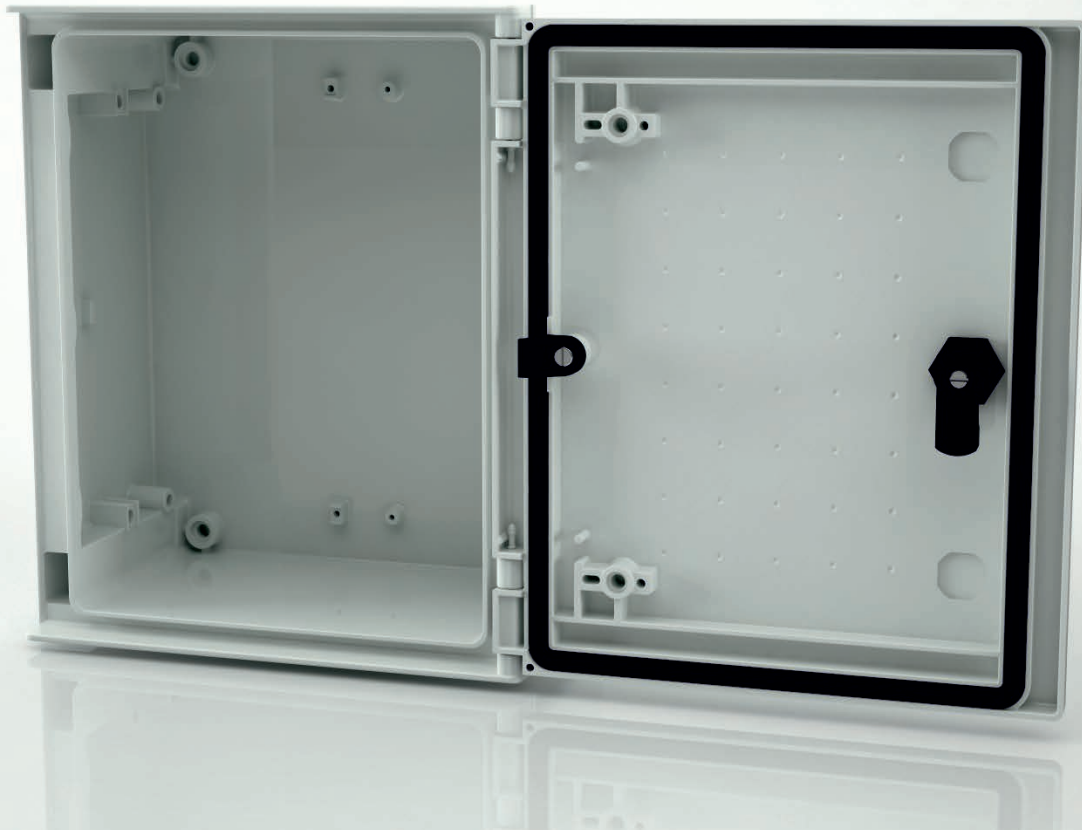

FEATURES

SafyBox BRES

- Boxes & Cabinets made from fiber glass reinforced polyester, moulded by hot compression.
- Colour Light Grey RAL 7035
- Self-extinguishability: 960° test withstanding. Halogen free. Double insulation. No electrical contact risks.
- Degree of protection Ip66 UNE 20324 (EN 60529).
- Certification of compliance with IEC62208 enclosure standard. Suitable for indoor or outdoor use.
- Large door opening (180°). Version with plain or glazed door. Reversibility for installation right or left door opening.
- Anti-intruder hinges system.
- Customise service: colour, machining, mounting accessories, locks, company logo.
- 1 lock with double-bar insert or 1 lock with 3 action points and vandalism-proof.
- Version with metallic or polyester mounting plate.
- Resistant to harsh atmospheres.
- Light weight gives an easy installation.
- +10 years. Long life lasting without maintenance under standard environmental conditions.

Code	Description	Height x Width x Depth	Weight
BRES-325	Empty standard enclosure colour light grey RAL 7035	300 x 250 x 140 mm	1,93 kg








MONOBLOCK INDUSTRIAL ENCLOSURE IP66

BRES-325

Polyester enclosure 300 x 250 x 140 mm

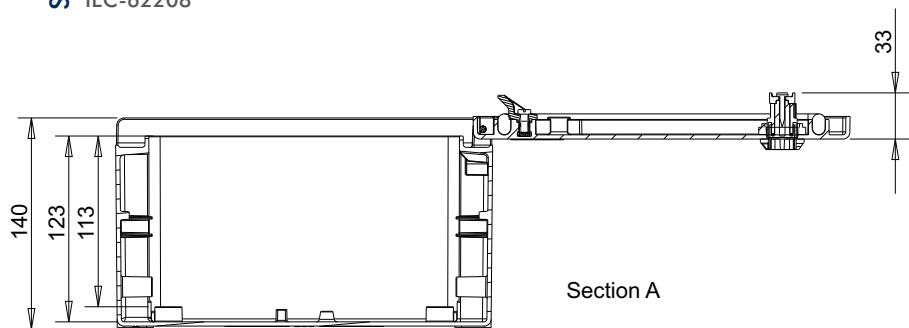

Section A

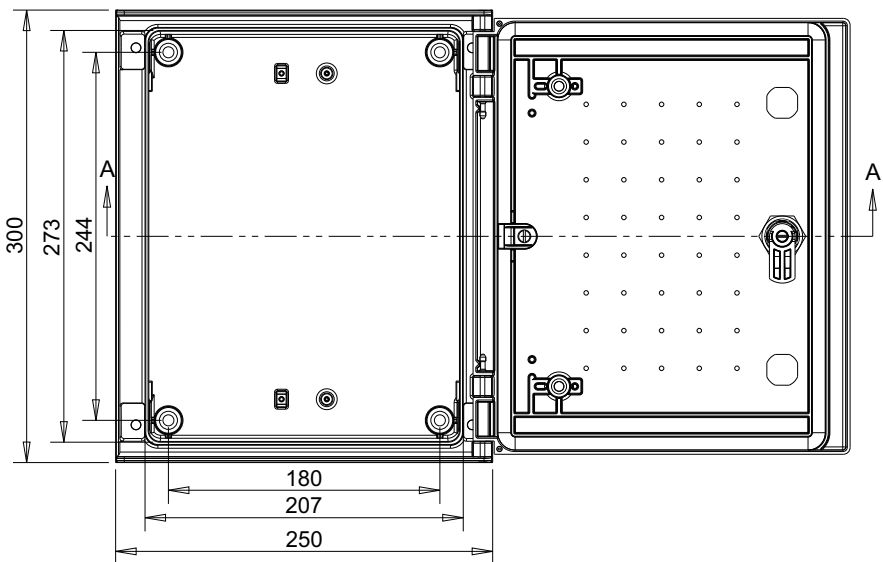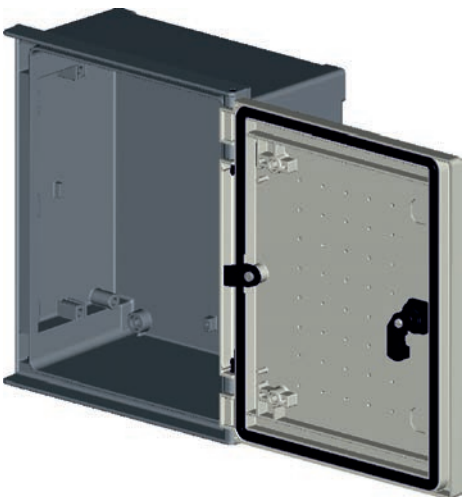

Packaging

packaging unit	1	packaging height	301,0 mm	Units per pallet 120 x 80 cm (Height 220 cm)	130
number of doors	1	packaging width	251,0 mm	Units per pallet 110 x 110 cm (Height 220 cm)	208
weight	1,93 kg	packaging depth	141,5 mm	Units per pallet 155 x 110 cm (Height 220 cm)	270

Environmental performance

Minimum temperature	-30 °C	IP dust water protection degree IEC-60529	66
Maximum temperature	70°C	IK impact protection degree IEC-50298	10
Compression resistance	100 kg		

Electrical performance

Nominal tension direct current up to:	1500 VdC
Nominal tension alternative current up to:	1000 VaC
Maximum power dissipation ΔT=104°F (wall surface)	36,2 W

Installation and assembly system

Inside installation	Yes	Wall surface	Yes
Outdoor installation	Yes	Floor mounting	Yes
Flush mounting	No	Pole mounting	Yes



MONOBLOCK INDUSTRIAL ENCLOSURE IP66



BRES-43

Polyester enclosure 400 x 300 x 200 mm



FEATURES

SafyBox BRES

- Boxes & Cabinets made from fiber glass reinforced polyester, moulded by hot compression.
- Colour Light Grey RAL 7035
- Self-extinguishability: 960° test withstanding. Halogen free. Double insulation. No electrical contact risks.
- Degree of protection Ip66 UNE 20324 (EN 60529).
- Certification of compliance with IEC62208 enclosure standard. Suitable for indoor or outdoor use.
- Large door opening (180°). Version with plain or glazed door. Reversibility for installation right or left door opening.
- Anti-intruder hinges system.
- Customise service: colour, machining, mounting accessories, locks, company logo.
- 2 lock with double-bar insert or 1 lock with 3 action points and vandalism-proof.
- Version with metallic or polyester mounting plate.
- Resistant to harsh atmospheres.
- Light weight gives an easy installation.
- +10 years. Long life lasting without maintenance under standard environmental conditions.

Code	Description	Height x Width x Depth	Weight
BRES-43	Empty standard enclosure colour light grey RAL 7035	400 x 300 x 200 mm	3,60 kg






MONOBLOCK INDUSTRIAL ENCLOSURE IP66

BRES-43



Polyester enclosure 400 x 300 x 200 mm



Standard
IEC
IEC-62208

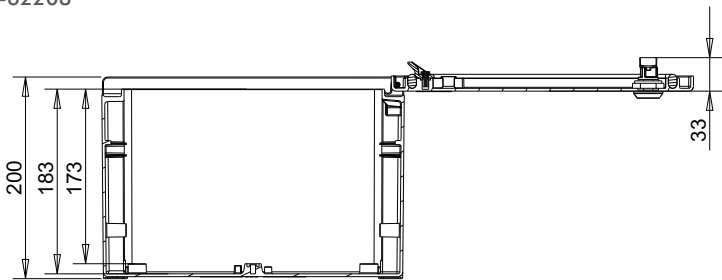

Section A

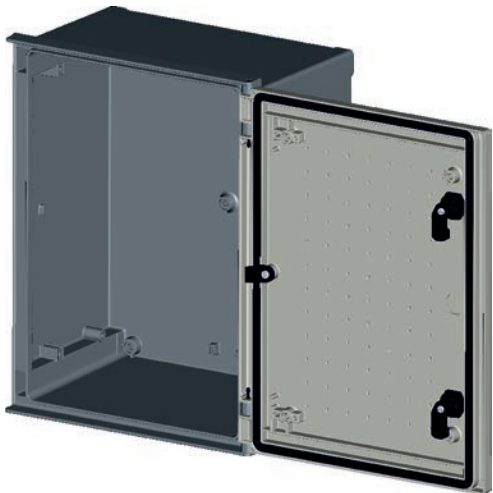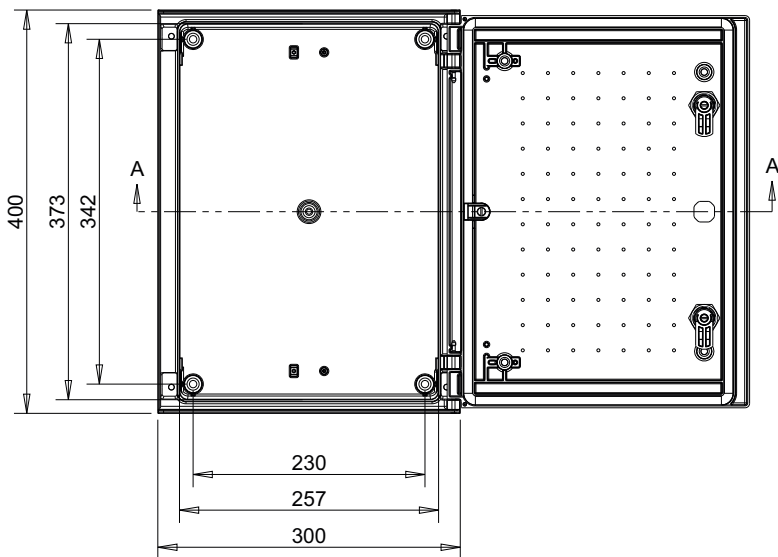

Packaging

packaging unit	1	packaging height	401,0 mm	Units per pallet 120 x 80 cm (Height 220 cm)	66
number of doors	1	packaging width	301,0 mm	Units per pallet 110 x 110 cm (Height 220 cm)	84
weight	3,60 kg	packaging depth	201,5 mm	Units per pallet 155 x 110 cm (Height 227 cm)	119

Environmental performance

Minimum temperature	-30 °C	IP dust water protection degree IEC-60529	66
Maximum temperature	70°C	IK impact protection degree IEC-50298	10
Compression resistance	100 kg		

Electrical performance

Nominal tension direct current up to:	1500 VdC
Nominal tension alternative current up to:	1000 VaC
Maximum power dissipation $\Delta T=104^{\circ}F$ (wall surface)	58,8 W

Installation and assembly system

Inside installation	Yes	Wall surface	Yes
Outdoor installation	Yes	Floor mounting	Yes
Flush mounting	No	Pole mounting	Yes




MONOBLOCK INDUSTRIAL ENCLOSURE IP66



BRES-44

Polyester enclosure 400 x 400 x 200 mm

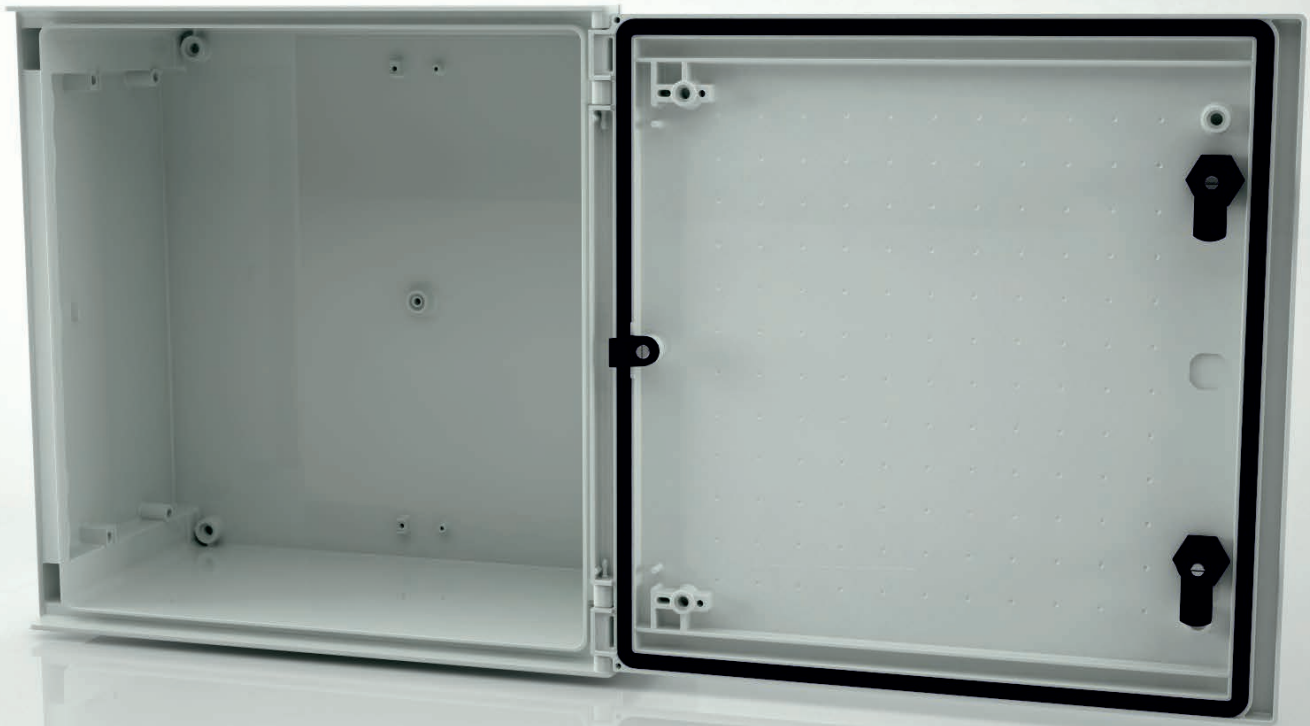

FEATURES

SafyBox BRES

- Boxes & Cabinets made from fiber glass reinforced polyester, moulded by hot compression.
- Colour Light Grey RAL 7035
- Self-extinguishability: 960° test withstanding. Halogen free. Double insulation. No electrical contact risks.
- Degree of protection Ip66 UNE 20324 (EN 60529).
- Certification of compliance with IEC62208 enclosure standard. Suitable for indoor or outdoor use.
- Large door opening (180°). Version with plain or glazed door. Reversibility for installation right or left door opening.
- Anti-intruder hinges system.
- Customise service: colour, machining, mounting accessories, locks, company logo.
- 2 lock with double-bar insert or 1 lock with 3 action points and vandalism-proof.
- Version with metallic or polyester mounting plate.
- Resistant to harsh atmospheres.
- Light weight gives an easy installation.
- +10 years. Long life lasting without maintenance under standard environmental conditions.

Code	Description	Height x Width x Depth	Weight
BRES-44	Empty standard enclosure colour light greyo RAL 7035	400 x 400 x 200 mm	4,35 kg








MONOBLOCK INDUSTRIAL ENCLOSURE IP66

BRES-44

Polyester enclosure 400 x 400 x 200 mm

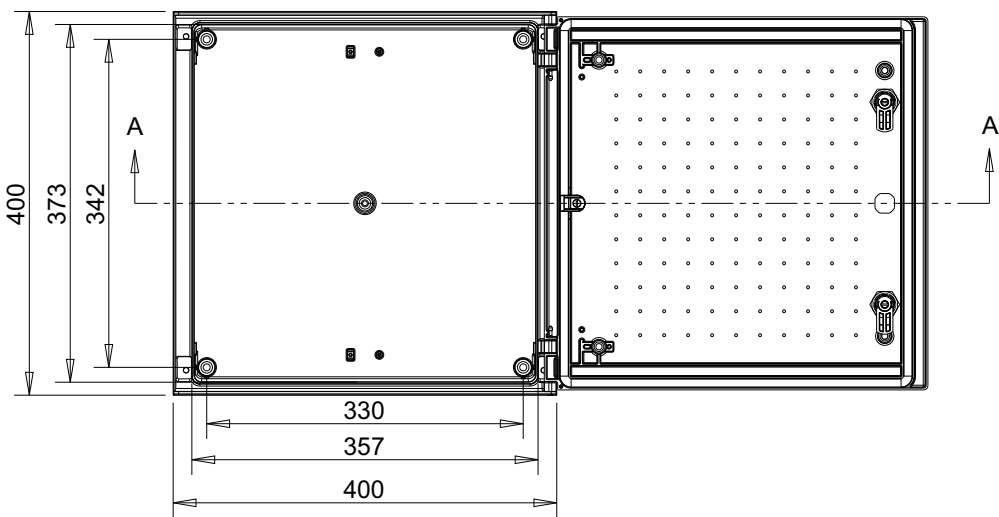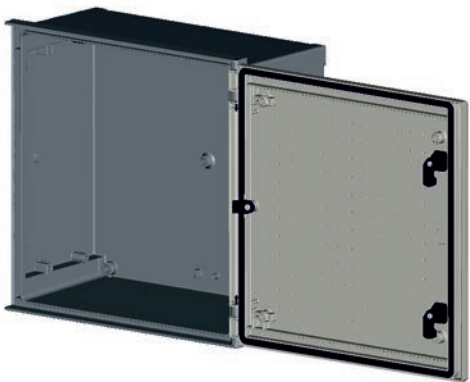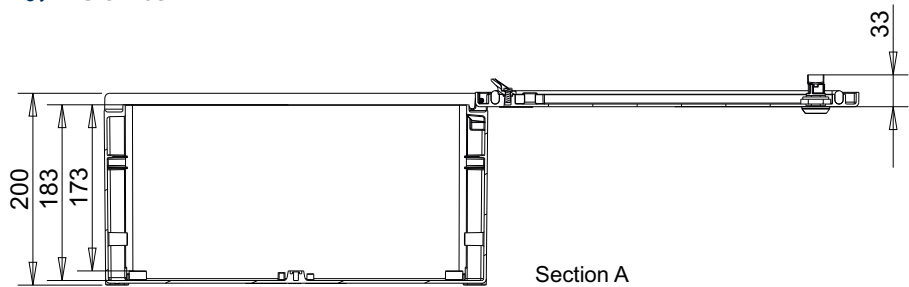

Packaging

packaging unit	1	packaging height	401,0 mm	Units per pallet 120 x 80 cm (Height 220 cm)	54
number of doors	1	packaging width	401,0 mm	Units per pallet 110 x 110 cm (Height 220 cm)	60
weight	4,35 kg	packaging depth	201,5 mm	Units per pallet 155 x 110 cm (Height 220 cm)	85

Environmental performance

Minimum temperature	-30 °C	IP dust water protection degree IEC-60529	66
Maximum temperature	70°C	IK impact protection degree IEC-50298	10
Compression resistance	100 kg		

Electrical performance

Nominal tension direct current up to:	1500 VdC
Nominal tension alternative current up to:	1000 VaC
Maximum power dissipation ΔT=104°F (wall surface)	72,6 W

Installation and assembly system

Inside installation	Yes	Wall surface	Yes
Outdoor installation	Yes	Floor mounting	Yes
Flush mounting	No	Pole mounting	Yes



MONOBLOCK INDUSTRIAL ENCLOSURE IP66



BRES-54

Polyester enclosure 500 x 400 x 200 mm



FEATURES

SafyBox BRES

- Boxes & Cabinets made from fiber glass reinforced polyester, moulded by hot compression.
- Colour Light Grey RAL 7035
- Self-extinguishability: 960° test withstanding. Halogen free. Double insulation. No electrical contact risks.
- Degree of protection Ip66 UNE 20324 (EN 60529).
- Certification of compliance with IEC62208 enclosure standard. Suitable for indoor or outdoor use.
- Large door opening (180°). Version with plain or glazed door. Reversibility for installation right or left door opening.
- Anti-intruder hinges system.
- Customise service: colour, machining, mounting accessories, locks, company logo.
- 2 lock with double-bar insert or 1 lock with 3 action points and vandalism-proof.
- Version with metallic or polyester mounting plate.
- Resistant to harsh atmospheres.
- Light weight gives an easy installation.
- +10 years. Long life lasting without maintenance under standard environmental conditions.

Code	Description	Height x Width x Depth	Weight
BRES-54	Empty standard enclosure colour light grey RAL 7035	500 x 400 x 200 mm	5,25 kg








MONOBLOCK INDUSTRIAL ENCLOSURE IP66

BRES-54

Polyester enclosure 500 x 400 x 200 mm

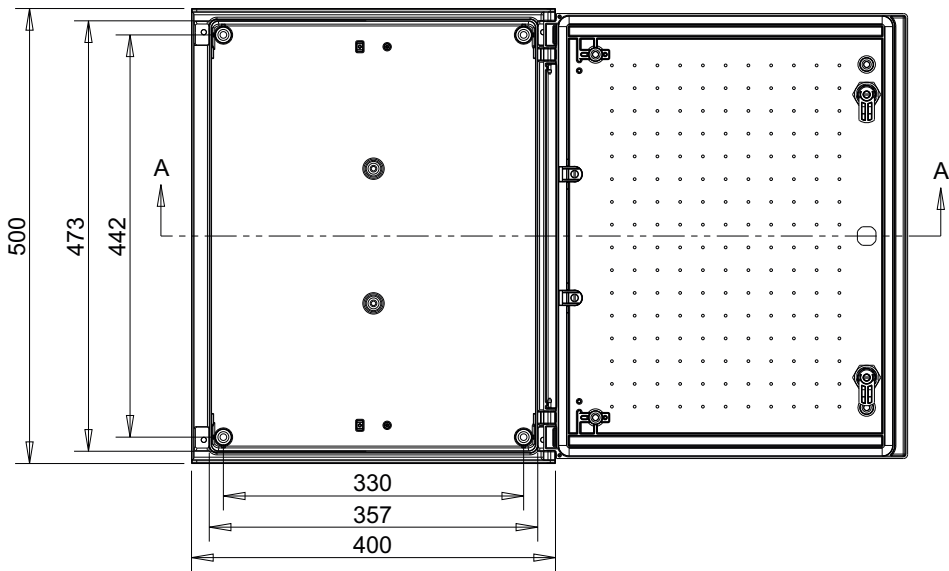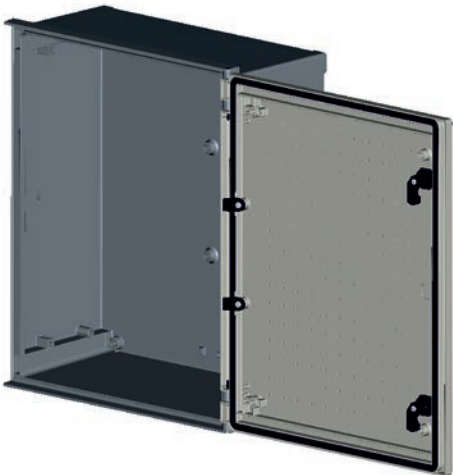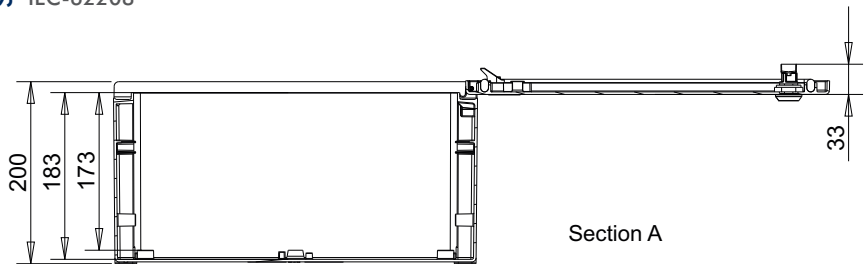

Packaging

packaging unit	1	packaging height	501,0 mm	Units per pallet 120 x 80 cm (Height 220 cm)	44
number of doors	1	packaging width	401,0 mm	Units per pallet 110 x 110 cm (Height 220 cm)	50
weight	5,25 kg	packaging depth	201,5 mm	Units per pallet 155 x 112 cm (Height 220 cm)	66

Environmental performance

Minimum temperature	-30 °C	IP dust water protection degree IEC-60529	66
Maximum temperature	70°C	IK impact protection degree IEC-50298	10
Compression resistance	100 kg		

Electrical performance

Nominal tension direct current up to:	1500 VdC
Nominal tension alternative current up to:	1000 VaC
Maximum power dissipation ΔT=104°F (wall surface)	82,9 W

Installation and assembly system

Inside installation	Yes	Wall surface	Yes
Outdoor installation	Yes	Floor mounting	Yes
Flush mounting	No	Pole mounting	Yes




MONOBLOCK INDUSTRIAL ENCLOSURE IP66



BRES-64

Polyester enclosure 600 x 400 x 230 mm

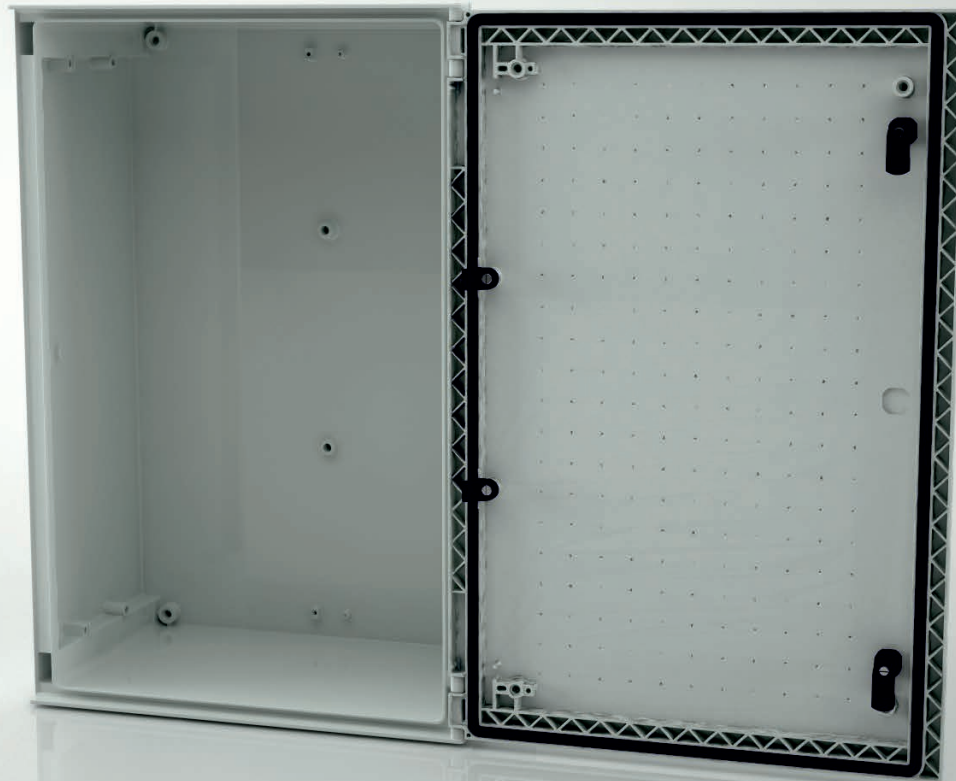

FEATURES

SafyBox BRES

- Boxes & Cabinets made from fiber glass reinforced polyester, moulded by hot compression.
- Colour Light Grey RAL 7035
- Self-extinguishability: 960° test withstanding. Halogen free. Double insulation. No electrical contact risks.
- Degree of protection Ip66 UNE 20324 (EN 60529).
- Certification of compliance with IEC62208 enclosure standard. Suitable for indoor or outdoor use.
- Large door opening (180°). Version with plain or glazed door. Reversibility for installation right or left door opening.
- Anti-intruder hinges system.
- Customise service: colour, machining, mounting accessories, locks, company logo.
- 2 lock with double-bar insert or 1 lock with 3 action points and vandalism-proof.
- Version with metallic or polyester mounting plate.
- Resistant to harsh atmospheres.
- Light weight gives an easy installation.
- +10 years. Long life lasting without maintenance under standard environmental conditions.

Code	Description	Height x Width x Depth	Weight
BRES-64	Empty standard enclosure colour light grey RAL 7035	600 x 400 x 230 mm	7,13 kg






MONOBLOCK INDUSTRIAL ENCLOSURE IP66

BRES-64




Polyester enclosure 600 x 400 x 230 mm



Standard
IEC
IEC-62208

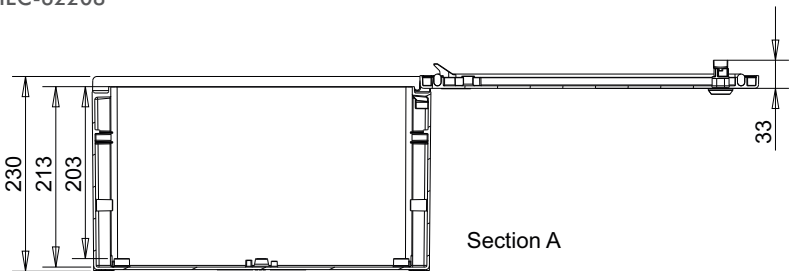

Section A

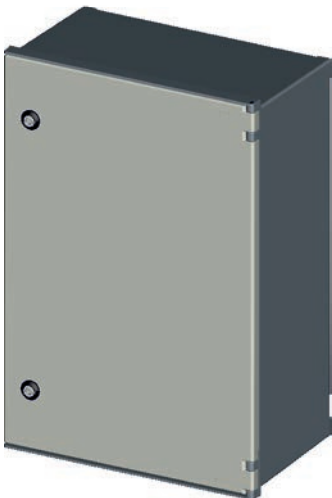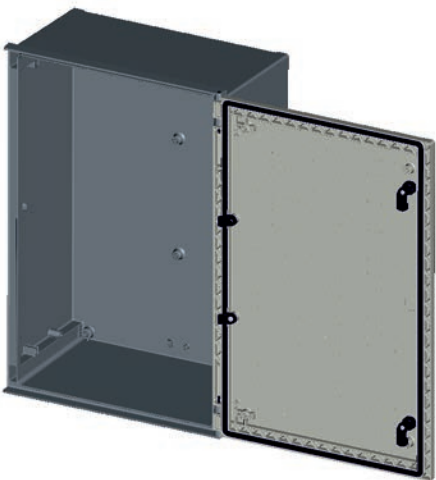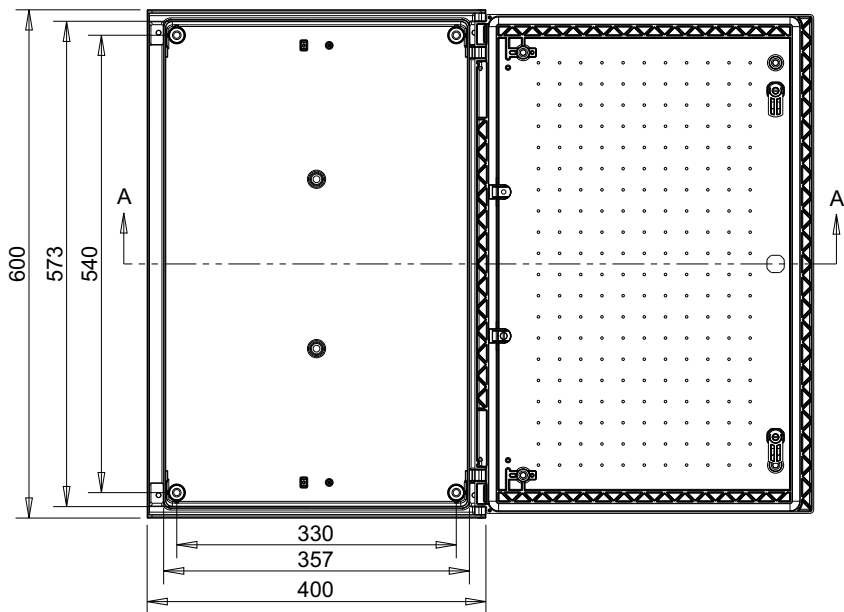

Packaging

packaging unit	1	packaging height	601,0 mm	Units per pallet 120 x 80 cm (Height 220 cm)	32
number of doors	1	packaging width	401,0 mm	Units per pallet 110 x 110 cm (Height 220 cm)	40
weight	7,13 kg	packaging depth	231,5 mm	Units per pallet 155 x 110 cm (Height 220 cm)	47

Environmental performance

Minimum temperature	-30 °C	IP dust water protection degree IEC-60529	66
Maximum temperature	70°C	IK impact protection degree IEC-50298	10
Compression resistance	100 kg		

Electrical performance

Nominal tension direct current up to:	1500 VdC
Nominal tension alternative current up to:	1000 VaC
Maximum power dissipation ΔT=104°F (wall surface)	99,4 W

Installation and assembly system

Inside installation	Yes	Wall surface	Yes
Outdoor installation	Yes	Floor mounting	Yes
Flush mounting	No	Pole mounting	Yes




MONOBLOCK INDUSTRIAL ENCLOSURE IP66



BRES-65

Polyester enclosure 600 x 500 x 230 mm

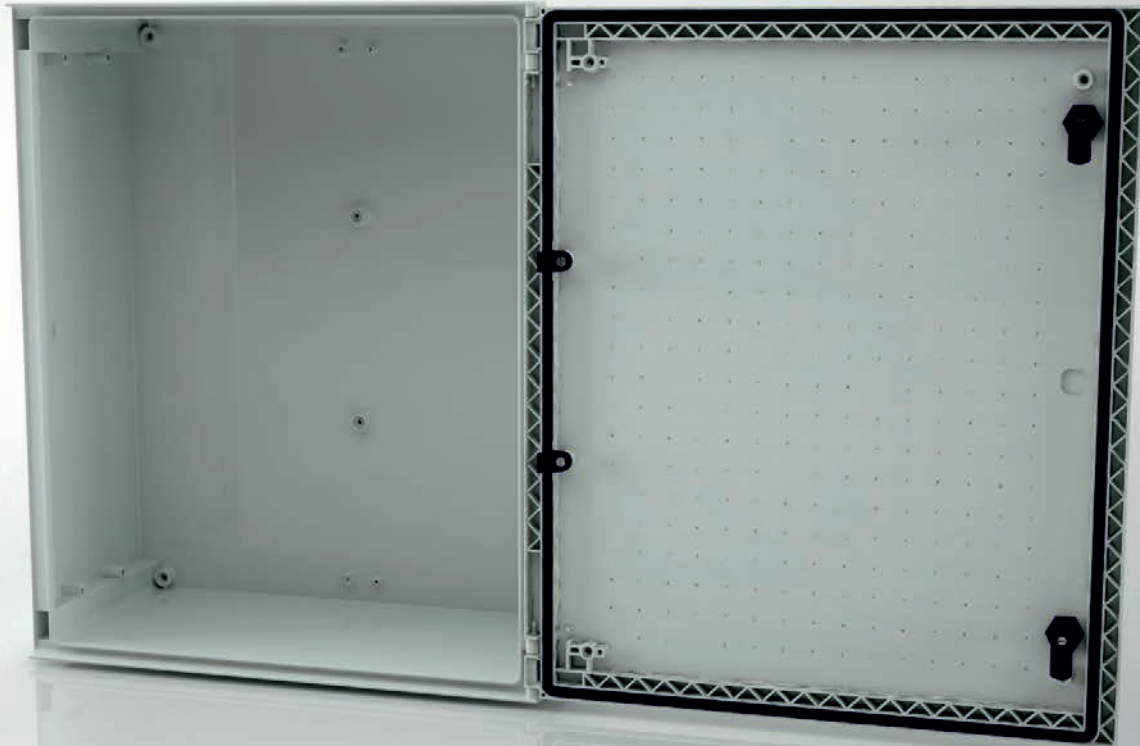

FEATURES

SafyBox BRES

- Boxes & Cabinets made from fiber glass reinforced polyester, moulded by hot compression.
- Colour Light Grey RAL 7035
- Self-extinguishability: 960° test withstanding. Halogen free. Double insulation. No electrical contact risks.
- Degree of protection Ip66 UNE 20324 (EN 60529).
- Certification of compliance with IEC62208 enclosure standard. Suitable for indoor or outdoor use.
- Large door opening (180°). Version with plain or glazed door. Reversibility for installation right or left door opening.
- Anti-intruder hinges system.
- Customise service: colour, machining, mounting accessories, locks, company logo.
- 2 lock with double-bar insert or 1 lock with 3 action points and vandalism-proof.
- Version with metallic or polyester mounting plate.
- Resistant to harsh atmospheres.
- Light weight gives an easy installation.
- +10 years. Long life lasting without maintenance under standard environmental conditions.

Code	Description	Height x Width x Depth	Weight
BRES-65	Empty standard enclosure colour light grey RAL 7035	600 x 500 x 230 mm	7,93 kg






MONOBLOCK INDUSTRIAL ENCLOSURE IP66

BRES-65

Polyester enclosure 600 x 500 x 230 mm

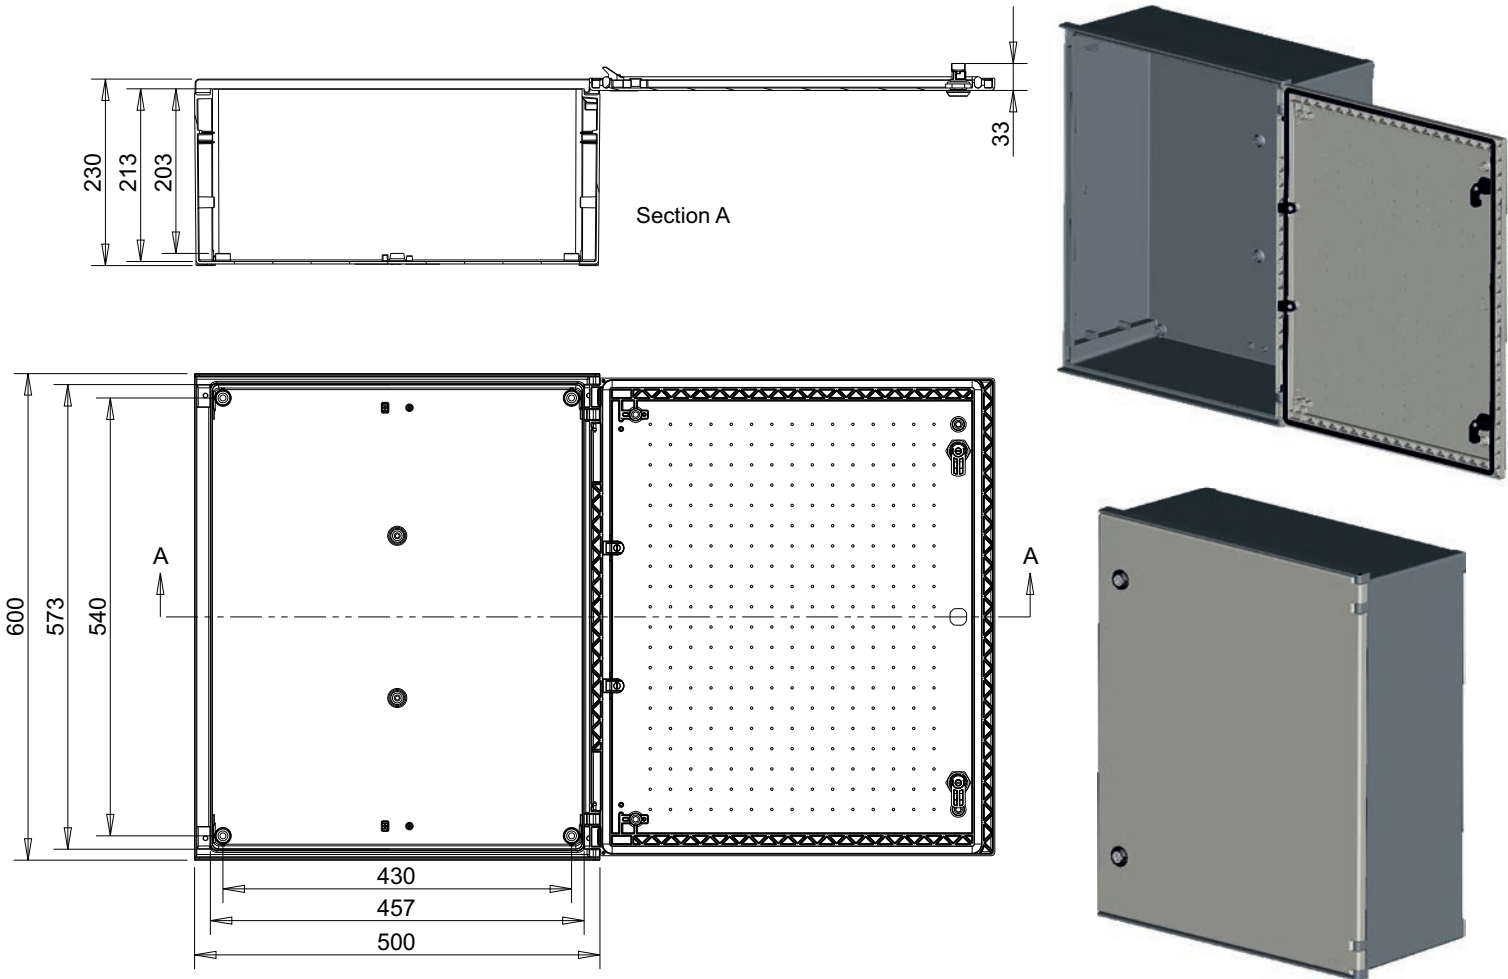

Packaging

packaging unit	1	packaging height	601,0 mm	Units per pallet 120 x 80 cm (Height 220 cm)	24
number of doors	1	packaging width	501,0 mm	Units per pallet 110 x 110 cm (Height 220 cm)	32
weight	7,93 kg	packaging depth	231,5 mm	Units per pallet 155 x 122 cm (Height 220 cm)	43

Environmental performance

Minimum temperature	-30 °C	IP dust water protection degree IEC-60529	66
Maximum temperature	70°C	IK impact protection degree IEC-50298	10
Compression resistance	100 kg		

Electrical performance

Nominal tension direct current up to:	1500 VdC
Nominal tension alternative current up to:	1000 VaC
Maximum power dissipation ΔT=104°F (wall surface)	117,0 W

Installation and assembly system

Inside installation	Yes	Wall surface	Yes
Outdoor installation	Yes	Floor mounting	Yes
Flush mounting	No	Pole mounting	Yes



MONOBLOCK INDUSTRIAL ENCLOSURE IP66



BRES-83

Polyester enclosure 800 x 300 x 230 mm



FEATURES

SafyBox BRES

- Boxes & Cabinets made from fiber glass reinforced polyester, moulded by hot compression.
- Colour Light Grey RAL 7035
- Self-extinguishability: 960° test withstanding. Halogen free. Double insulation. No electrical contact risks.
- Degree of protection Ip66 UNE 20324 (EN 60529).
- Certification of compliance with IEC62208 enclosure standard. Suitable for indoor or outdoor use.
- Large door opening (180°). Version with plain or glazed door. Reversibility for installation right or left door opening.
- Anti-intruder hinges system.
- Customise service: colour, machining, mounting accessories, locks, company logo.
- 2 lock with double-bar insert or 1 lock with 3 action points and vandalism-proof.
- Version with metallic or polyester mounting plate.
- Resistant to harsh atmospheres.
- Light weight gives an easy installation.
- +10 years. Long life lasting without maintenance under standard environmental conditions.

Code	Description	Height x Width x Depth	Weight
BRES-83	Empty standard enclosure colour light grey RAL 7035	800 x 300 x 230 mm	6,40 kg








MONOBLOCK INDUSTRIAL ENCLOSURE IP66

BRES-83

Polyester enclosure 800 x 300 x 230 mm

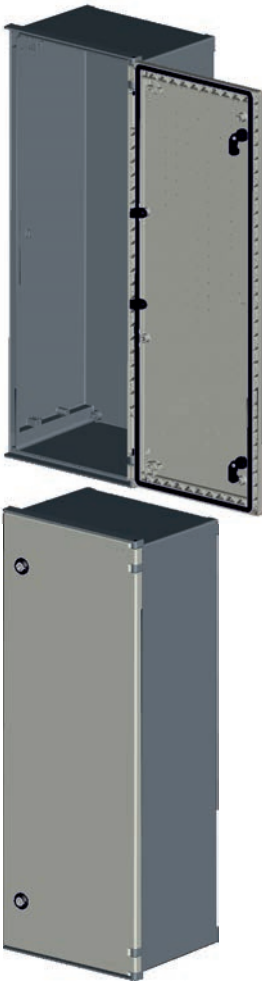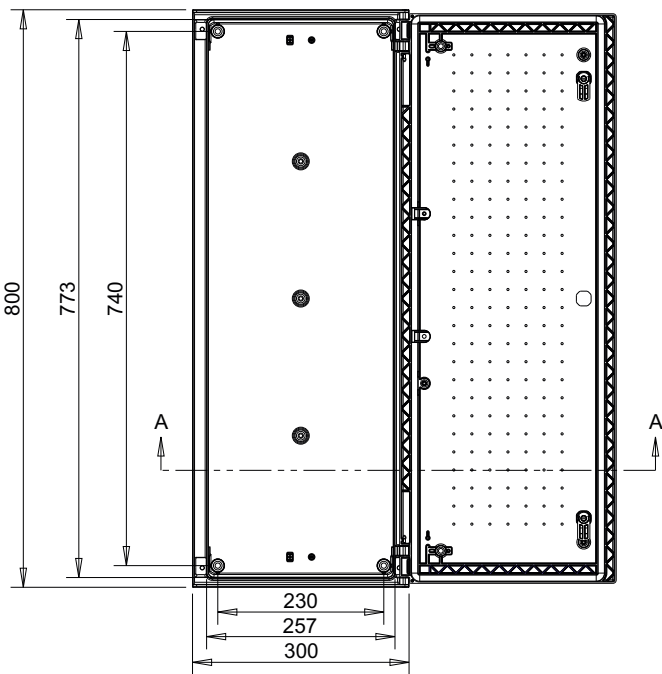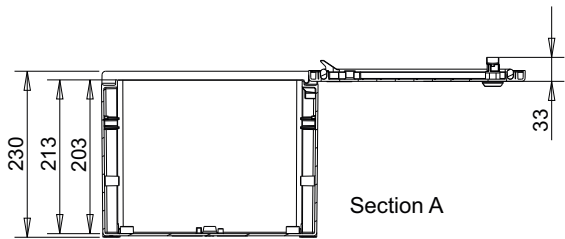

Packaging

packaging unit	1	packaging height	801,0 mm	Units per pallet 120 x 80 cm (Height 220 cm)	24
number of doors	1	packaging width	301,0 mm	Units per pallet 110 x 110 cm (Height 220 cm)	24
weight	6,40 kg	packaging depth	231,5 mm	Units per pallet 155 x 110 cm (Height 220 cm)	36

Environmental performance

Minimum temperature	-30 °C	IP dust water protection degree IEC-60529	66
Maximum temperature	70°C	IK impact protection degree IEC-50298	10
Compression resistance	100 kg		

Electrical performance

Nominal tension direct current up to:	1500 VdC
Nominal tension alternative current up to:	1000 VaC
Maximum power dissipation ΔT=104°F (wall surface)	103,0 W

Installation and assembly system

Inside installation	Yes	Wall surface	Yes
Outdoor installation	Yes	Floor mounting	Yes
Flush mounting	No	Pole mounting	Yes




MONOBLOCK INDUSTRIAL ENCLOSURE IP66



BRES-86

Polyester enclosure 800 x 600 x 300 mm

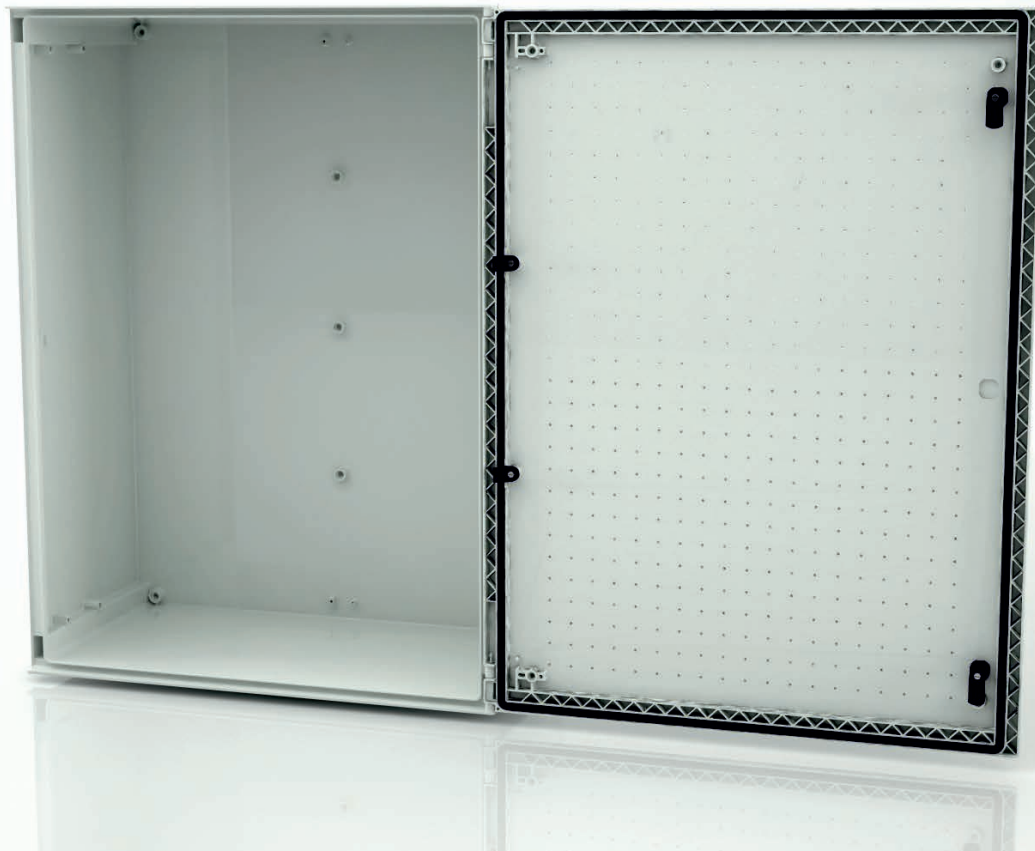

FEATURES

SafyBox BRES

- Boxes & Cabinets made from fiber glass reinforced polyester, moulded by hot compression.
- Colour Light Grey RAL 7035
- Self-extinguishability: 960° test withstanding. Halogen free. Double insulation. No electrical contact risks.
- Degree of protection Ip66 UNE 20324 (EN 60529).
- Certification of compliance with IEC62208 enclosure standard. Suitable for indoor or outdoor use.
- Large door opening (180°). Version with plain or glazed door. Reversibility for installation right or left door opening.
- Anti-intruder hinges system.
- Customise service: colour, machining, mounting accessories, locks, company logo.
- 2 lock with double-bar insert or 1 lock with 3 action points and vandalism-proof.
- Version with metallic or polyester mounting plate.
- Resistant to harsh atmospheres.
- Light weight gives an easy installation.
- +10 years. Long life lasting without maintenance under standard environmental conditions.

Code	Description	Height x Width x Depth	Weight
BRES-86	Empty standard enclosure colour light grey RAL 7035	800 x 600 x 300 mm	12,65 kg








MONOBLOCK INDUSTRIAL ENCLOSURE IP66

BRES-86

Polyester enclosure 800 x 600 x 300 mm

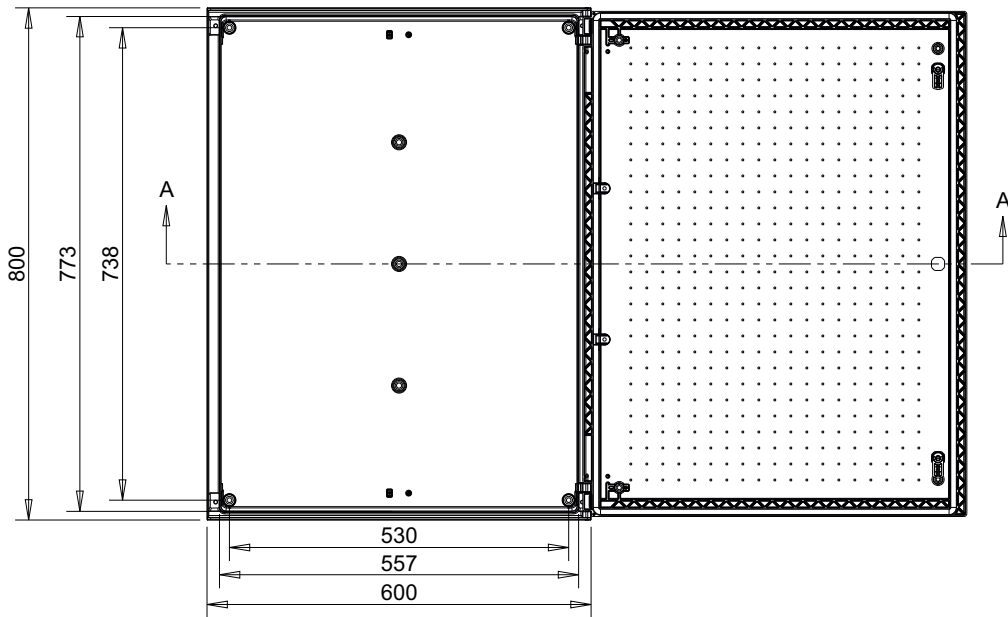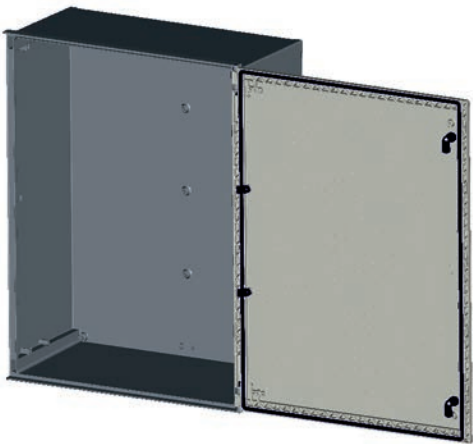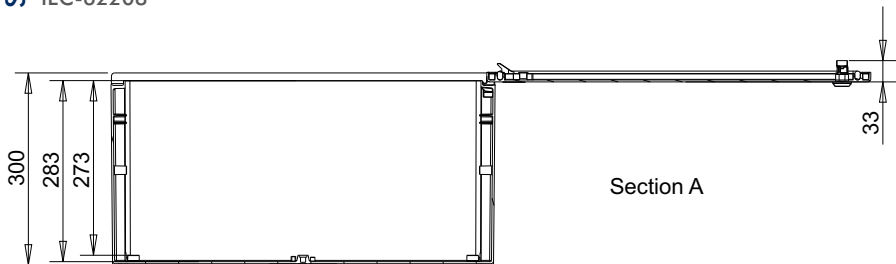

Packaging

packaging unit	1	packaging height	801,0 mm	Units per pallet 120 x 80 cm (Height 210 cm)	12
number of doors	1	packaging width	601,0 mm	Units per pallet 110 x 110 cm (Height 210 cm)	12
weight	12,65 kg	packaging depth	301,5 mm	Units per pallet 162 x 110 cm (Height 210 cm)	18

Environmental performance

Minimum temperature	-30 °C	IP dust water protection degree IEC-60529	66
Maximum temperature	70°C	IK impact protection degree IEC-50298	10
Compression resistance	100 kg		

Electrical performance

Nominal tension direct current up to:	1500 VdC
Nominal tension alternative current up to:	1000 VaC
Maximum power dissipation $\Delta T=104^{\circ}F$ (wall surface)	185,0 W

Installation and assembly system

Inside installation	Yes	Wall surface	Yes
Outdoor installation	Yes	Floor mounting	Yes
Flush mounting	No	Pole mounting	Yes